


Preventive Maintenance Guatemala

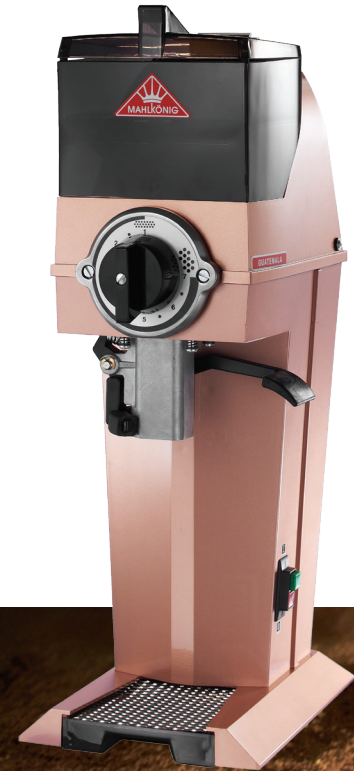

The professional art of grinding
since 1924

1. Cleaning:

Always unplug the coffee grinder before cleaning.

- Apply dry cleaning only. If necessary use suitable mild „dish“ washer detergent.
- No alkaline cleaning agent must be used for cleaning (affects flavour).
- Do not spray coffee grinder with water and/or steam (risk of short circuit).
- Clean your grinder periodically, at least once a week.
- Please use MAHLKÖNIG GRINDZ™

Cleaning of housing:

- Use paper towel along with mild dish washer detergent to clean the housing, cover lid and inside the hopper.

Cleaning of spout tube:

- Use a vacuum cleaner to exhaust the discharge tube. The use of brushes can lead to the damage of the built-in flappers resulting in an inaccurate grinding result.

Periodic checking of the grinder, grinding discs and grinding quality must only be performed by competent service personnel and/or trained staff.

2. Routine Check:

Indications:

- Reduction of the output of the grinder.
- Temperature increase of the ground coffee
- Inconsistent grind
- Increased amount of dust
- Grinder clogs more often

3. Maintenance:

Short-term maintenance every 2 weeks

- Outside cleaning including the hopper
- Use GRINDZ™

Long-term maintenance once a year

- Thorough cleaning of the grinder including the opening of the grinder housing and removing of all coffee residues
- Change of discs
- Checking calibration and re-calibrate, if necessary

Spare part proposal Guatemala:

1 x adjustment cap	309696
1 x residue tray	300480
1 x pre-breaker	300073
1 x pair of burr discs	309700
1 x shear plate	303864
1 x spout	309552
1 x rubber buffer	302741
1 x pulling-off device for pre-breaker	304041

MAHLKÖNIG GmbH & Co. KG

Tilsiter Straße 142
D- 22047 Hamburg, Germany

Phone: +49 (0)40 / 69 69 40-0

Fax: +49 (0)40 / 69 39 721

office@mahlkoenig.de ; www.mahlkoenig.de

June 2015

Subject to change without prior notice!!



The professional art of grinding
since 1924